
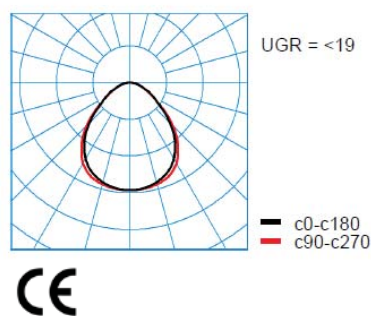


## FINO584 1500 x 600 LED PANEL

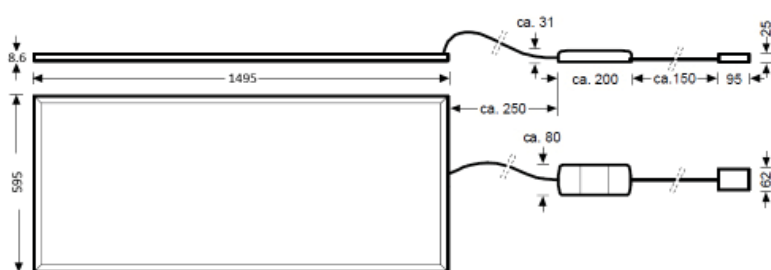

### FEATURES

- High performance COB and high CRI (Ra >90)
- High uniformity with wide beam distribution
- Glare-free and shadow-free illumination
- Slim design featuring narrow aluminium silver frame with matte opal diffuser
- Fully dimmable 1-10V and DALI driver
- Easy installation for T-bar ceiling systems

### APPLICATIONS

- Suitable for health, office, conference rooms, corridors, retail areas and waiting zones.

### TECHNICAL DATA

<b>LED CHIP</b>	Osram LED chip
<b>LED QTY</b>	224 pcs
<b>POWER CONSUMPTION</b>	60W
<b>COLOUR TEMP</b>	3000K   4000K
<b>CRI (Ra)</b>	≥90
<b>EFFICACY</b>	100 lm/Watts
<b>DIMMABLE</b>	1-10V   DALI
<b>BASE</b>	(±10%) AC
<b>SOURCE LIFE</b>	50,000 hours L70

### DIMENSIONS

1495 mm (L) x 595mm (W) x 8.6mm (H)

### FINISH

Anodised aluminium with high efficiency opal polystyrene diffuser. Special powder-coat on request.

### MOUNTING

For standard metric T-Bar ceiling recessed installation. Plaster ceiling recessed installation kit, suspension installation kit and surface mounting installation kit also available.