


28.8 WATTS PER METRE



COLOUR	CODE	LUMENS	EFFICACY
WARM WHITE 3000 K	BL-LS-2001-WW	2069 lm/m	74 lm/W
NATURAL WHITE 4000 K	BL-LS-2001-NW	1988 lm/m	71 lm/W

COLOUR VARIANCE: +/- 200 K
LUMEN TOLERANCE +/- 10 %
SOLD BY THE METRE

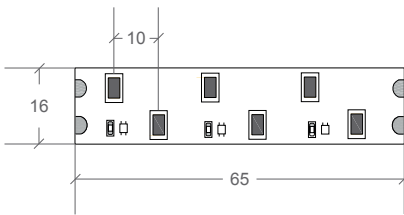

TECHNICAL DATA


LED WATTS	28.8 W/m
INPUT VOLTS	24 V DC Constant Voltage
INPUT AMPS	1200 mA/m
OPERATING TEMP	- 25 °C ~ + 50 °C
RUNNING TEMP	60 °C

NOTE: Aluminium profile as part of the installation is required for thermal management

High product running temperatures will have an effect on lumen output over time.

CRI (Ra)	> 75
BEAM ANGLE	115°
SOURCE LIFE	50,000 hours
WARRANTY	2 years
MAX. RUN PER FEED	5 metres
INGRESS PROTECTION	Indoor use only
LED PITCH	10 mm alternating
CUTTING LENGTH	65 mm
CONTROL	Dimmable by PWM signal

NOTE: Onboard constant current



BL-LS-2001-XX

DIMENSIONS

W 16 x H 5 mm

MOUNTING

3M VHB mounting tape