
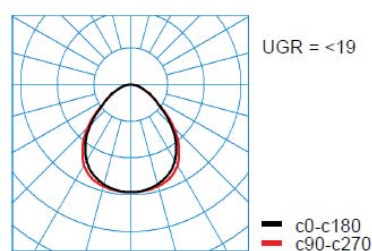


FINO587 1200 x 90 LED PANEL

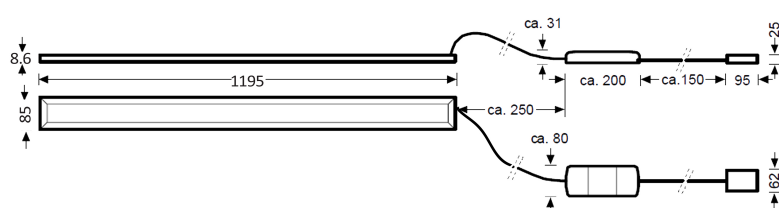

FEATURES

- High performance COB and high CRI (Ra >90)
- High uniformity with wide beam distribution
- Glare-free and shadow-free illumination
- Slim design featuring narrow aluminium silver frame with matte opal diffuser
- Fully dimmable 1-10V and DALI driver
- Easy installation for T-bar ceiling systems

APPLICATIONS

- Suitable for health, office, corridors, retail areas and waiting zones.

TECHNICAL DATA

LED CHIP	Osram LED chip
LED QTY	112 pcs
POWER CONSUMPTION	42W
COLOUR TEMP	3000K 4000K
CRI (Ra)	≥90
EFFICACY	100 lm/Watts
DIMMABLE	1-10V DALI
BASE	(±10%) AC
SOURCE LIFE	50,000 hours L70

INPUT VOLTAGE	90 ~ 264 VAC
FREQUENCY	50/60 Hz
DIMENSIONS	1195 mm (L) x 85 mm (W) x 8.6mm (H)
WEIGHT	2000 g
PROTECTION RATING	IP20 IP44 (on request)
UGR	<19