
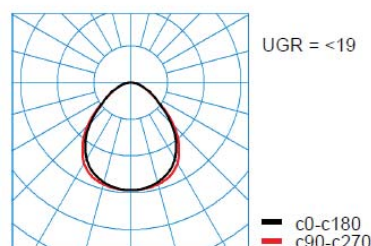
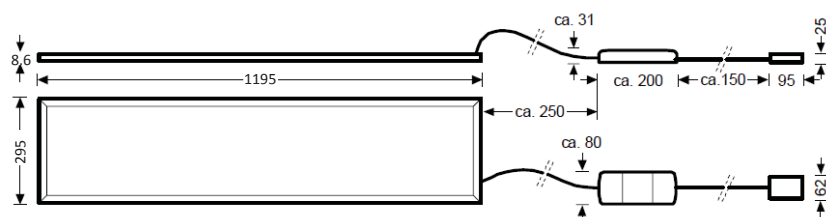


FINO585 | 1200 x 300 LED PANEL

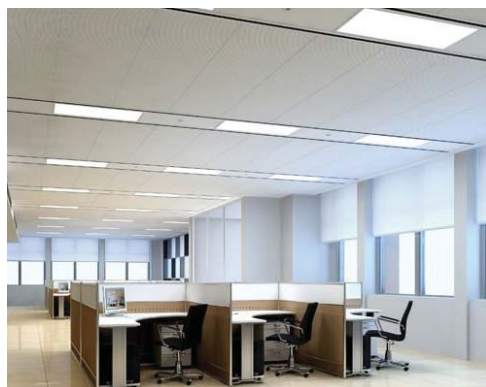

FEATURES

- High performance COB and high CRI (Ra >90)
- High uniformity with wide beam distribution
- Glare-free and shadow-free illumination
- Slim design featuring narrow aluminium silver frame with matte opal diffuser
- Fully dimmable 1-10V and DALI driver
- Easy installation for T-bar ceiling systems

APPLICATIONS

- Suitable for health, office, conference rooms, corridors, retail areas and waiting zones.

TECHNICAL DATA

LED CHIP	Osram LED chip
LED QTY	112 pcs
POWER CONSUMPTION	25W 36W 46W
COLOUR TEMP	3000K 4000K
CRI (Ra)	≥90
EFFICACY	100 lm/Watts
DIMMABLE	1-10V DALI
BASE	(±10%) AC
SOURCE LIFE	50,000 hours L70

DIMENSIONS

1196 mm (L) x 296mm (W) x 8.6mm (H)

FINISH

Anodised aluminium with high efficiency opal polystyrene diffuser. Special powder-coat on request.

MOUNTING

For standard metric T-Bar ceiling recessed installation. Plaster ceiling recessed installation kit, suspension installation kit and surface mounting installation kit also available.